


Features/Applications

GREMSHAPES® GCAPS is a hot melt lined polyolefin heat shrink moulded end cap. GREMSHAPES® GCAPS offers a superior resistance to oxidation, UV radiation and excellent encapsulation properties. GREMSHAPES® GCAPS is suitable for both on exterior and underground power distribution cables (up to 1kV) and telecommunication cables with PVC or XLPE sheath.

Various

Standard colour: Black.

Dimensions

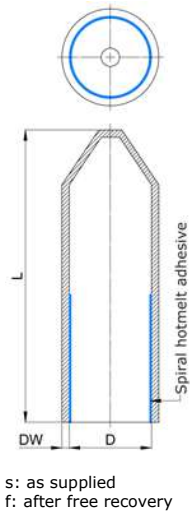

Reference <i>GREMSHAPES® GCAPS</i>	Standard length end caps				
	Ds (min.)	Df (max.)	Ls (min.)	Dwf (nom.)	Cable Diameter (mm)
006,0	6	2	25	2,0	2 - 4
012,0	12	4	40	2,3	4 - 8
014,0	14	4	58	2,3	4 - 11
020,0	20	7,5	55	2,3	8 - 16
025,0	25	8	55	2,3	8 - 20
030,0	30	11	75	2,5	12 - 26
035,0	35	11	75	2,5	12 - 30
040,0	40	15	90	3,3	16 - 35
055,0	55	25	125	3,5	25 - 47
075,0	75	35	140	4,0	35 - 68
100,0	100	45	160	4,0	45 - 90
130,0	130	60	155	4,6	64 - 120
158,0	158	60	165	4,6	70 - 145
230,0	230	125	220	4,0	140 - 200
310,0	310	120	220	7,0	140 - 280
	Extended length end cap				
-L 012,0	12	4	58	2,3	4 - 8
-L 020,0	20	8	75	2,5	8 - 16
-L 040,0	40	15	120	3,3	16 - 35
-L 055,0	55	25	170	3,5	25 - 47
-L 063,0	63	25	125	3,5	25 - 55
-L 075,0	75	35	180	4,0	35 - 68
-L 100,0	100	45	200	4,0	45 - 90
-L 120,0	120	45	160	4,0	45 - 110

• s : as supplied / f : after free recovery

Property

		Values	Test Methods
Physical	Working temperature	-40°C to +110°C	-
	Tensile strength	> 12 MPa	ASTM D 638
	Elongation at break	Unaged > 350%	ASTM D 638
	Tensile strength	Aged (500h @ 120°C) > 11 MPa	ASTM D 638
	Elongation at break after aging	> 300%	ASTM D 638
	Low temperature flexibility	4h @ -40°C No cracking	ASTM D 2671
	Heat shock	1/2h @ 250°C No cracking or flowing	ESI 09-11
	Electrical	Dielectric strength	> 12kV/mm
Volume resistivity		> 1x10 ¹⁴ Ω.cm	ASTM D 257
Chemical	Water absorption	0,2% (max.)	ASTM D 570
Adhesive	Softening point (Ball & ring)	85°C	-
	Melting process temperature	160°C to 180°C	-
	Resistant against being in contact with oil	Pass	-

Recommended storage conditions: Keep in cool, dry, ventilated storage (maximum temperature of 35°C) and in closed containers.



07/02/2019 Rev7

Whilst every attempt is made to provide data that is as accurate as possible the values provided should be treated as a guide only. It remains the responsibility of the user to test the product and determine suitability. GREMTEK shall not be held responsible for any loss or defect resulting from incorrect, improper or inappropriate use of this product.